

D1 Remote Switch

Flexibility

The D1 remote switch is an easy to use product. Users can easily control the smart lighting device by setting the scene. The controller can be placed on the wall or bedside through its magnetic backplane, or directly on iron materials such as refrigerators and iron cabinets.


Highly customizable

The D1 remote switch direct access to all important Casambi lighting control functions. The preset keys on the D1 remote switch can be configured via the Casambi App. Personalized ICONS can be customized on the keys according to the needs of customers.


Long Range Mode

There are three radio modes: 'Balanced', 'Better Performance' and now 'Long Range' options. Long-range capabilities can reach approx. 120 meters with a good line of sight connection between nodes.


COLOR



Mica white
PC



Starlight gold
PC




Dark grey
PC



TECHNICAL PARAMETER

Product size	86 x 86 x 12 mm
Package size	100 x 100 x 60 mm
Weight	0.10kg
Gross weight	0.11 kg
Installation mode	Magnetic/Portabl
Input	3V (2 X CR2032 batteries)
Network mode	Bluetooth Casambi
Material	AL/PC/Glass
Fire rating	94~v0
Working temperature	-10°C~+60°C
Working humidity	≤95%RH, Non-condensing

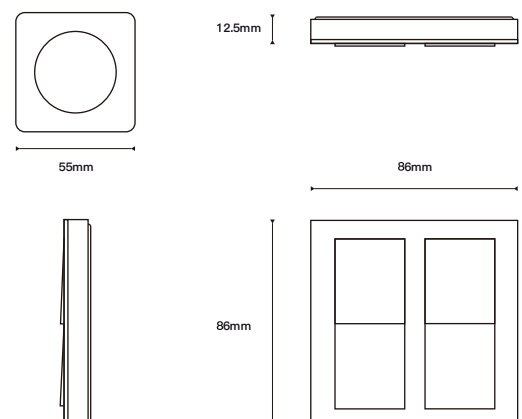


BASIC FUNCTIONS

The preset buttons of D1 Remote Ccontrol can be configured via the Casambi app. A light indicates the selected preset.

Preset buttons:

- Individual luminaire control
- Group control
- Control of all luminaires
- Recall scenes
- Recall animations

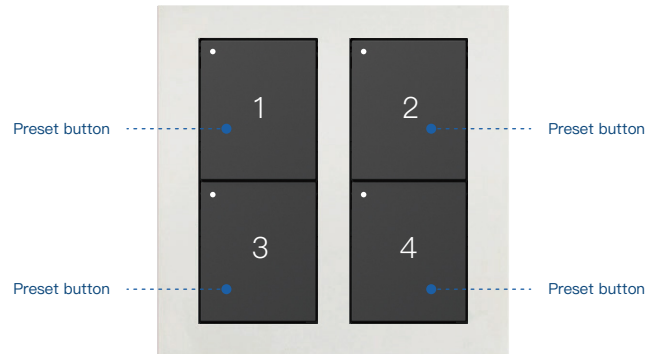

SMART FUNCTIONS

Preset Buttons

- Press:
The chosen preset (luminaire control, group control, all luminaires, scene recall or animation recall) will turn on
- Press again:
The chosen preset (luminaire control, group control, all luminaires, scene recall or animation recall) will turn off