

D1 Rotary Switch

Intuitive Operation

The D1 rotary switch can be used as the control panel of a single scene to separately control the brightness of a lamp or control the brightness of lights in different areas.

Highly customizable

The D1 rotary switch gives direct access to all the important Casambi lighting control functionalities. The preset buttons of D1 rotary switch can be configured via the Casambi App.




COLOR



Phantom gray
AG glass



Starlight gold
AG glass



Mica white
AG glass



Lava white
Art glass





Lava gray
Art glass

TECHNICAL PARAMETER

Product size	86 x 86 x 25.4 mm (The knob is 16mm)
Bottom shell depth	28mm
Package size	100 x 100 x 75 mm
Weight	0.173kg
Gross weight	0.298kg
Installation mode	86 Mounting box depth: >50mm

Input voltage	110~240VAC 50/60Hz
Network mode	Bluetooth Casambi
Material	AG glass
Fire rating	94-v0
Working temperature	-10°C~+60°C
Working humidity	≤95%RH, Non-condensing

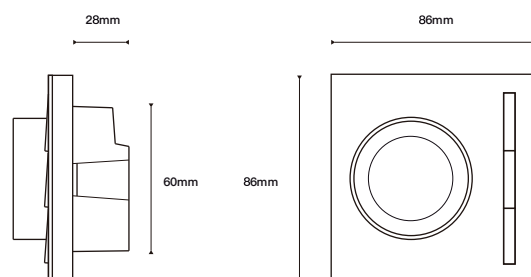

BASIC FUNCTIONS


The preset buttons of D1 rotary switch can be configured via the Casambi app. A light indicates the selected preset.

Dim up, Dim down:

- Smooth dimming of bound lamps, groups, and scenes

Preset buttons:

- Individual luminaire control
- Group control
- Control of all luminaires
- Recall scenes
- Recall animations

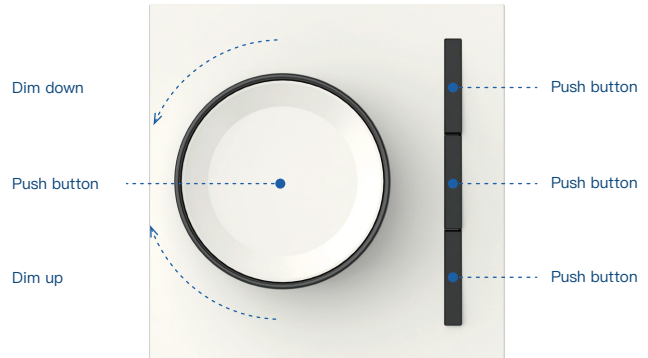

SMART FUNCTIONS

Dimming

- Turn the knob for dimming:
Smooth dimming of bound lamps, groups, and scenes
- Turn the knob anticlockwise:
Chosen preset goes to 0%
- Turn the knob clockwise:
Chosen preset goes to 100%

Relay

- Up to 2 relays will provide on/off circuit breaker function

Push Buttons

- Press:
The chosen preset (luminaire control, group control, all luminaires, scene recall or animation recall) will turn on
- Press again:
The chosen preset (luminaire control, group control, all luminaires, scene recall or animation recall) will turn off

Turn Off

- Press the Dim down and Dim up button for more than 1 second:
Turns all luminaires off in selected network